

Aqua R1



IP68



Kg 0,200



Kg 500




TECHNICAL DATA

Application	Floor / Wall / Ceiling Recessed Spot Light
Location	Indoor / Outdoor
Light Source	LED
Optics	8°, 23°, 43°, WW-10°x41°
LED No.	1
LED Life time (L80B10)	50000 hours
Input Voltage / Current	350mA / 500mA
Connection details	Series
Installation	Recessed (Ceiling, Wall, Floor) Brick work installation with housing box (not included) Panel installation with torsion spring (not included)
Weight	Kg 0,15
Installation hole	Ø32mm
Supply	350 mA / 500mA Max
Wiring	Provided with 500cm neoprene cable
Working Temperature	-20°C - +50°C

FINISHING

Materials	AISI 316L Stainless steel trim, tempered glass diffuser
Finishing	Worked Steel (I)
Color	Matte Steel
Diffuser	Tempered Glass

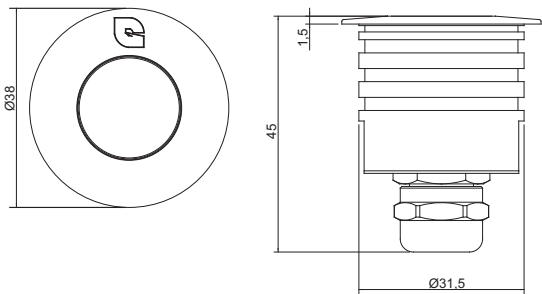

Family	Type	LED NO	WAT/LED	CCT	Optics	Finish	Power	Dimming	Options
AQ - Aqua	R1 - Round	1	1	27-2700K	8-8°	I - Worked Steel	CC-	N - None	xxx
			2	30-3000K	23-23°		(350mA/500mA)		
				40-4000K	43-43°				
				50-5000K	WW - 10°x41°				
				RD-Red					
				GR-Green					
				BL-Blue					
				22-2200K					
				XX- Custom					


Sample: AQ - R1 - 1 - 1 - 27 - 8 - I - CC - N - XX

ACCESSORIES

CAW6839-Acetal resin housing box

Gel Connector

Optional



5625/1121



Micro Paguro



xxx