




# arena

Recessed floor spotlight, ideal for the lighting of steps, sidewalks, facades, paths and gardens. It has been designed specifically to produce low glare illumination to walls and columns

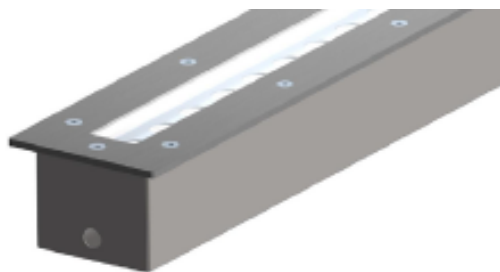

Stainless steel body satinized stainless steel top tempered glass

No. 1 standard finishings

Led no. 15 x 1 / 2 W ( 520 mm )

30 x 1 / 2 W ( 970 mm )

39 x 1 / 2 W ( 1230 mm )

Power absorption 21/42 W ( 520 mm )

41/84 W ( 970 mm )

53/109 W ( 1230 mm )

Connection 230VAC

Wiring Provided with IP67 Connectors

Installation On Floor / Wall with housing (included)

Driver included

**IP 67**



Code	Options	Supply	N° LED	LED Color	Optics	Watt	Finish
AR	S 520 mm	R 230Vac	15	1 - 5000 K	1 - 10°	1	S - Steel
	M 970 mm		30	3 - 2700 K		2	
	L 1230 mm		39				

