

Deep
Flood




TECHNICAL DATA

Application	Underwater Flood Light
Location	Indoor / Outdoor
Light Source	LED
Optics	Narrow, Medium, Wide
LED Life time (L80B10)	50000 hours
Input Voltage / Current	24VDC
Connection details	Parallel
Installation	Surface mounted
Supply	240AC
Wiring	Provided with 500cm neoprene cable
Working Temperature	-30°C - +50°C
Lumen	70-85lm/W

FINISHING

Materials	AISI 316L Stainless steel trim, tempered glass diffuser
Finishing	Worked Steel (I)
Color	Matte Steel
Diffuser	Tempered Glass

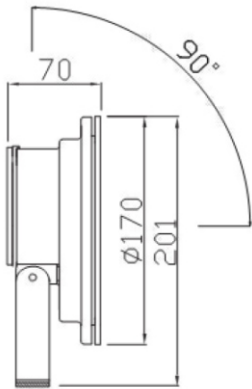

Family	Type	WATT	CCT	Optics	Finish	Power	Dimming	Options
DF - Deep Flood	R - Round	36	27 - 2700K	N - Narrow	I - Worked Steel	24 - 24V DC	D - Dimmable	xxx
		45	30 - 3000K	M - Medium				
		Custom	40 - 4000K	W - Wide				
			50 - 5000K					
			RGB - RGB					

Sample: DF - R - 36 - 27 - N - I - 24 - D - XX