


# Cage Q1

## TECHNICAL DATA

Application	Recessed (wall)
Location	Indoor
Light Source	LED
Optics	60° x 30°
LED No.	1
LED Life time (L80B10)	50000 hours
Input Voltage / Current	230Vac
Connection details	Parallel Connection
Installation	Wall Recessed
Weight	0,16Kg
Supply	230Vac
Wiring	Provided with 30cm PVC cable
Working Temperature	-40°C - +50°C

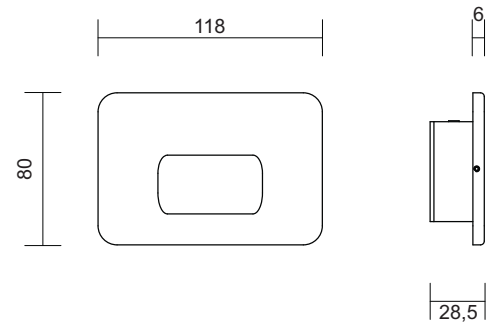

## FINISHING

Materials	Aluminium body, PMMA diffuser
Finishing	Anodized Aluminum (A)

Family	Type	LED NO	WAT/LED	CCT	Optics	Finish	Power	Dimming	Options
CA-Cage	Q1 - Square	1	4	27-2700K 30-3000K 40-4000K	60° x 30° Asymm.	A - Anodized Aluminum	AC - 230Vac	N - Non dimmable	XXX

Sample: CA - Q1 - 1 - 4 - 27 - 60 x 30 - A - AC - N - XX

## ACCESSORIES

CAZC1-Polypropylene housing box brickwork

CAZC2-Polypropylene housing box cardboard

